

Testing Transceivers for Chromatic Dispersion

One of the key challenges when testing transceivers and digital signal processing algorithms (DSP) for chromatic dispersion robustness is generating significant amounts of chromatic dispersion. While the most intuitive solution would be to use a transmission fiber setup, as it closely replicates field conditions, is this the most effective solution from a cost and performance standpoint?

TeraXion's ClearSpectrum™ CDE is a fixed, entirely passive chromatic dispersion emulator that has been developed to test the dispersion robustness of transceivers and DSP over thousands of kilometers of transmission fiber.


Based on TeraXion's reliable fiber Bragg grating technology, the CDE is significantly more cost-effective than a transmission fiber setup, it has a very low insertion loss and can emulate up to 45 000 ps/nm of dispersion in a very compact half 1U 19-inch rack module.

Suitable for Advanced Modulation Formats

Thanks to the different configurations offered, the CDE can be used to test a multitude of modulation formats, at different data rates.

The CDE has a proven track record in labs worldwide for testing the robustness of 100G/200G coherent DP-QPSK transceivers and DSP algorithms.

400G and 800G transceivers such as OSFP and QSFP-DD, are now tested for chromatic dispersion robustness, as per new established standards. Thanks to its wide bandwidth, the CDE can emulate dispersion at very high baud rates, including 136 Gbaud/s 800G signals.

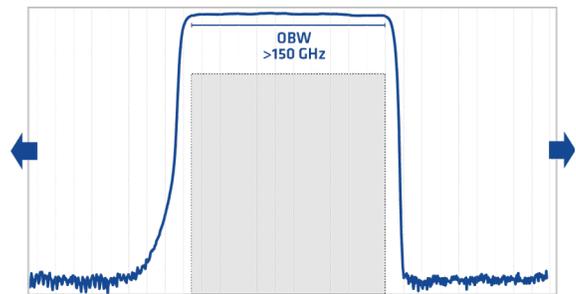

Transmission Rate	CDE Config
800G	Multi-Channel 150 GHz OBW
400G	Multi-Channel 70 GHz OBW
200G	Multi-channel 50 GHz OBW
100G	



A Highly Customizable Solution

	C-band / L-band				O-band ⁽²⁾
	Single-channel Module	Multi-channel Module		Single-channel Module	
Channel Spacing	N/A	1200 GHz	200 GHz	100 GHz	Upon request
Minimum Optical Bandwidth	350 GHz	150 GHz	70 GHz	50 GHz	Upon request
Dispersion Level per Module ⁽¹⁾	Up to 15 000 ps/nm	Up to 15 000 ps/nm	Up to 36 000 ps/nm	Up to 45 000 ps/nm	Upon request

(1) Modules can be cascaded to reach hundreds of thousands of thousands of ps/nm





(2) 100 G Lambda MSA compatible

One CDE, Many Configurations

The CDE can be used in most transmission applications as it is a standard product offering in both the C-band L-band. O-band configurations can also be offered upon request.

The C-band and L-band CDEs are offered in a multi-channel profile for testing 100G-800G optical modules at multiple wavelengths at once, or in a very wide bandwidth single-channel profile for the latest and upcoming high data rate applications.

C-band Profile Examples

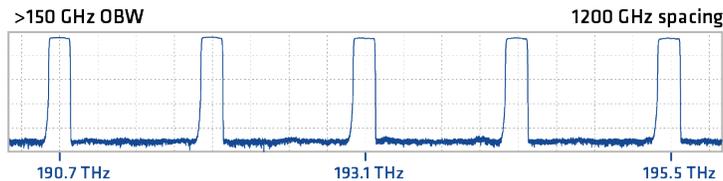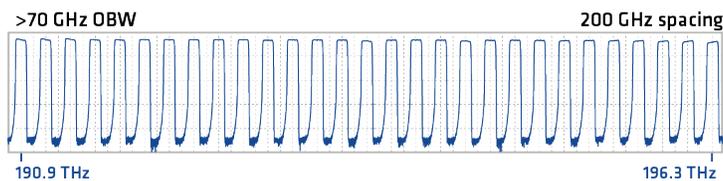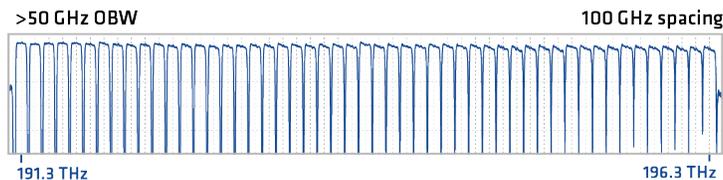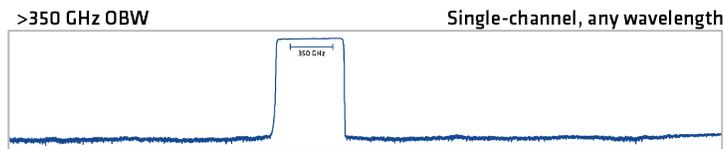

Massive Levels of Dispersion

While a single half 1U 19-inch module for C- or L-band can provide up to 45 000 ps/nm, it is possible to cascade multiple modules to reach massive levels of chromatic dispersion.

CDE vs Transmission Fiber

Save on the cost and space of fiber spools and EDFAs with a ClearSpectrum™ CDE.

Thanks to TeraXion's FBG-based design, the CDE emulates the dispersion of thousands of kilometers of transmission fiber in a single compact module and with fewer EDFAs, driving the total cost of acquisition down. And the CDE is as convenient to use as it gets; just plug and play.

Up to **3x**
LESS EXPENSIVE

Up to **10x**
LOSS REDUCTION

TeraXion
An indie Semiconductor Company

teraxion.com
2716 Einstein Street
Quebec, Quebec, CANADA G1P 4S8
+1 (877) 658-8372 / info@teraxion.com

2024 TeraXion Inc. All rights reserved.

TeraXion Inc. reserves all of its rights to make additions, modifications, improvements, withdrawals and/or changes to its product lines and/or product characteristics at any time and without prior notice. Although every effort is made to ensure the accuracy of the information provided on this document, TeraXion Inc. does not guarantee its exactness and cannot be held liable for inaccuracies or omissions.